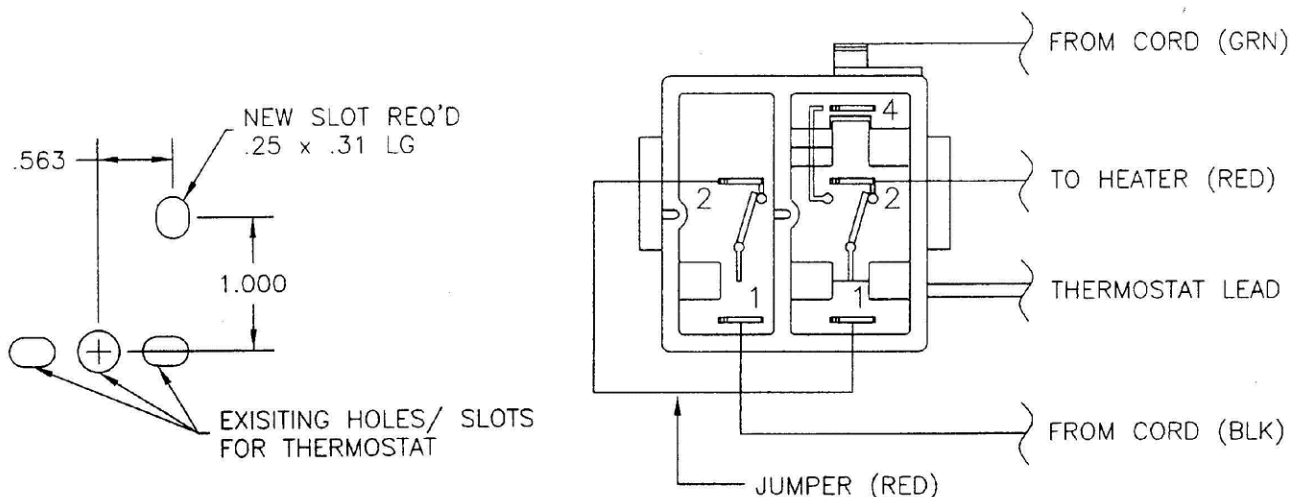


Thermostat Replacement Kit C-38718

The **Redundant Protection Thermostat** provides additional protection against overheat conditions.

⚠ Be sure electrical cord is unplugged and heater coil is cool before installing thermostat.

Retrofit Instructions:

When replacing an existing thermostat with this new model, follow the mounting and wiring instructions shown above to install this replacement unit in place of the original.

Usage Instructions:

Once power has been supplied to the unit, depress the red RESET button next to the thermostat dial to activate the protection circuit. Once set, thermostat function will operate normally.

Trip Reset Instructions:

In the event an overheat condition occurs, the secondary circuit in the thermostat will turn off the heaters at approximately 10°F ABOVE the last setting of the thermostat. Once the protection circuit is tripped, the unit cannot be reset and will not operate until the temperature of the fluid inside the unit is allowed to cool approximately 10-15°F BELOW the last setting on the thermostat. Once cooling has taken place, simply depress the red RESET button and thermostat function will operate normally.